



SOLACE SYNERGY SDN BHD

(1308828-M)

Passion • Innovation • Solution

PRODUCTS & SERVICES

- **Oil & Gas Related Services :**
 - Pipeline & Related Services
 - Equipment Supply
 - Skilled Manpower Supply
- **SOLACE Atmospheric Water Generator (SAWG)**
- **Military & Defense Products**



OIL & GAS SERVICES



Equipment Rental & Supply



ENGINE DRIVEN MULTISTAGE CENTRIFUGAL PUMP



Equipment Information

EQUIPMENT NAME	: ENGINE DRIVEN MULTISTAGE CENTRIFUGAL PUMP
EQUIPMENT CATEGORY	: FLOODING PUMP
EQUIPMENT TAG I.D.	: DCSB-FP-46
MANUFACTURER	: MF
MAXIMUM PRESSURE	: 350 METER / 35 BAR
MAXIMUM FLOWRATE	: 350 m ³ /HR @ 1800RPM @ 20 BAR
INLET CONNECTION	: 6" 150# FLANGE
OUTLET CONNECTION	: 8" 150# FLANGE
KID/FRAME TYPE	: OFFSHORE SPEC SPLIT SKID/ FRAME WITH 4 POINT LIFTING PAD EYE
OVERALL DIMENSION	: 4.5 x 1.5 x 2.15 METER (LxWxH)
1) ENGINE SIDE	: 2.25 x 1.5 x 2.15 METER (3,000kg)
2) PUMP SIDE	: 2.25 x 1.5 x 2.15 METER (3,000kg)
TOTAL WEIGHT	: 6,000kg
MANUFACTURE DATE	: SEPT 2014

Pump Information

PUMP NAME	: ENGINE DRIVEN MULTISTAGE CENTRIFUGAL PUMP
PUMP MODEL	: DH 280-43X5
PUMP S/N	: DC/008
RANK SHAFT SPEED	: 1800 RPM
RESSURE	: 35 BAR
LOWRATE	: 300 m ³ /hr @ 20BAR @ 1800RPM
PUMP TYPE	: MULTISTAGE CENTRIFUGAL
RESSURE RELIEF VALVE	: N/A
SV S/N	: N/A
INLET CONNECTION	: 8"
OUTLET CONNECTION	: 8"

Transmission Information

COUPLING TYPE	: DIRECT COUPLING
TRANSMISSION TYPE	: RUBBER DIRECT COUPLING
MODEL	: CENTAMAX
MODEL NO.	: NIL
FRIGIDANT	: NIL

Engine Information

ENGINE NAME	: CUMMINS DIESEL ENGINE
ENGINE TYPE	: 4 CYCLE, INLINE
ENGINE MODEL NO.	: NTAB55-P500
ENGINE S/N	: -
GROSS POWER	: 500HP
LOW IDLE SPEED	: 1000 RPM
FIRING ORDER	: 1-5-3-6-2-4
C.I.D. / L	: -
STARTER	: 24V
BATTERIES TYPE	: 24V
FUEL TANK CAPACITY	: 100 LITER

Related Certificate

MPI	Yes	☒	No	☐
LOAD TEST	Yes	☒	No	☐
PMT/PMA	Yes	☐	No	☒
PSV	Yes	☐	No	☒
DECEASE GAUGE	Yes	☒	No	☐

Equipment Rental & Supply



ELECTRICAL SUBMERSIBLE PUMP



Equipment Information

EQUIPMENT NAME	: ELECTRICAL DRIVEN SUBMERSIBLE PUMP
EQUIPMENT CATEGORY	: SUBMERSIBLE PUMP
EQUIPMENT TAG I.D.	: DCSB-SM-24
MANUFACTURER	: GRINDEX
MAXIMUM HEIGHT	: 40 METER
MAXIMUM FLOWRATE	: 500 m3/hr
INLET CONNECTION	: N/A
OUTLET CONNECTION	: 8"
KID/FRAME TYPE	: NIL
OVERALL DIMENSION	: 0.6 X 0.6 X 1.5 METER (LxWxH)
1) ENGINE SIDE	: N/A
2) PUMP SIDE	: N/A
NETAL WEIGHT	: 310 kg
MANUFACTURE DATE	: MAY 2013

Pump Information

UMP NAME	: SUBMERSIBLE GRINDEX PUMP	RATED OUTPUT	: 37 KW
UMP MODEL	: MAXI-N	POWER CONSUMPTION	: MAX : 41 KW
UMP S/N	: 1231956	RATED CURRENT AT 400V	: 65 A
RANK SHAFT SPEED	: 2950 RPM	RATED CURRENT AT 500V	: 52 A
RESSURE	: 4.5 BAR	RECOMMENDED GENSET	: Y/D 85/105 KWA
LOWRATE	: 500 m3/hr	DELAYED FUSE	: 100 A
UMP TYPE	: ELECTRICAL SUBMERSIBLE DRAINAGE PUMP	PERMISSIBLE CABLE	: 40 METER
RESSURE RELIEF VALVE	: N/A	LENGTH	
SV S/N	: N/A	MAX SUBMERSIBLE DEPTH	: 20 METER
INLET CONNECTION	: N/A	MAX LIQUID TEMP	: 40 DEGREE CELCIUS
OUTLET CONNECTION	: 8" 150#	SUPPLY VOLTAGE	: 400V / 3 PHASE / 50HZ

Transmission Information

COUPLING TYPE	: NIL
TRANSMISSION TYPE	: NIL
MODEL	: NIL
MODEL NO.	: NIL
SERIAL NUMBER	: NIL

Related Certificate

MPI	Yes	☐	No	☒
LOAD TEST	Yes	☐	No	☒
PMT/PMA	Yes	☐	No	☒
PSV	Yes	☐	No	☒
PRESSURE GAUGE	Yes	☐	No	☒

ENGINE DRIVEN HIGH PRESSURE PUMP JC-3090



Equipment Information

EQUIPMENT NAME	: ENGINE DRIVEN HIGH PRESSURE PUMP JC-3090
EQUIPMENT CATEGORY	: HIGH PRESSURE PUMP
EQUIPMENT TAG I.D.	: DCSB-HP-20
MANUFACTURER	: DYNAMIC CURVE
MAXIMUM PRESSURE	: 5,500 PSI / 300 BAR
MAXIMUM FLOWRATE	: 174 LITER/MIN
INLET CONNECTION	: 2" NPT
OUTLET CONNECTION	: 1" NPT
KID/FRAME TYPE	: OFFSHORE SPEC SINGLE FRAME WITH 4 POINT LIFTING PADEYE
OVERALL DIMENSION	: 2.2x1.4x1.7 METER (LxWxH)
1) ENGINE SIDE	: N/A
2) PUMP SIDE	: N/A
NETAL WEIGHT	: 2,200 kg
MANUFACTURE DATE	: JULY 2014

Pump Information

UMP NAME	: HIGH PRESSURE PUMP JC-3090
UMP MODEL	: SW-3090
UMP S/N	: DC14001HP
RANK SHAFT SPEED	: 1800 RPM
RESSURE	: 300 BAR
LOWRATE	: 174 LITER/MIN
UMP TYPE	: SINGLE ACTING TRIPLEX PLUNGER
RESSURE RELIEF VALVE	: YES
SV S/N	: RE0504
INLET CONNECTION	: 2" NPT
OUTLET CONNECTION	: 1" NPT

Engine Information

ENGINE NAME	: ISUZU DIESEL ENGINE
ENGINE TYPE	: 4 CYCLE, INLINE
ENGINE MODEL NO.	: ISUZU 6GB1T
ENGINE S/N	: 6BG1-346314
GROSS POWER	: 148 PS @ 1800 RPM
LOW IDLE SPEED	: 1000 RPM
FIRING ORDER	: -
C.I.D. / L	: -
STARTER	: 24V
BATTERIES TYPE	: 24V
FUEL TANK CAPACITY	: 100 LITER

Transmission Information

COUPLING TYPE	: DIRECT COUPLING
TRANSMISSION TYPE	: RUBBER DIRECT COUPLING
MODEL	: CENTAFLEX
MODEL NO.	: NIL
SERIAL NUMBER	: NIL

Related Certificate


MPI	Yes	☒	No	☐
LOAD TEST	Yes	☒	No	☐
PMT/PMA	Yes	☐	No	☒
PSV	Yes	☒	No	☐
PRESSURE GAUGE	Yes	☒	No	☐

Flange Management – Torquing & Tensioning



Flange Weld Tester


- RROS' Flange Weld Testers are designed to perform localised pressure tests eliminating the need for a full system test
- The tools are inserted into the flange connection, bolted up and seal set
- The annulus between the seal and the flange is filled/ vented with the test medium and pressurised to the flange rating
- 1/2" to 4" testers are mechanically actuated and 6" and above use a hydraulic powerpack

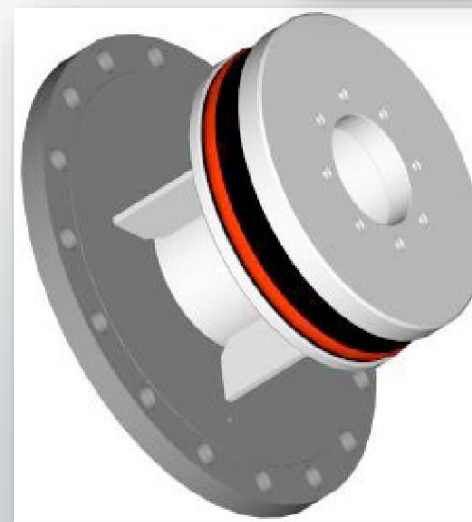

10" Flange Tester performing hydrotest on GRE pipe

Internal Weld Tester

- RROS's Internal Weld Testers are designed to pressure test weld neck flanges, flange joints and plain pipe butt welds eliminating the need for a full system test
- The tools are inserted into the line and positioned with the seals either side of the test area.
- The tool is then set and the annulus between the seals is filled/ vented with the test medium and pressurised to determine the integrity of the weld
- Can also be used as double block and bleed isolation whilst the line pipe hot work is conducted

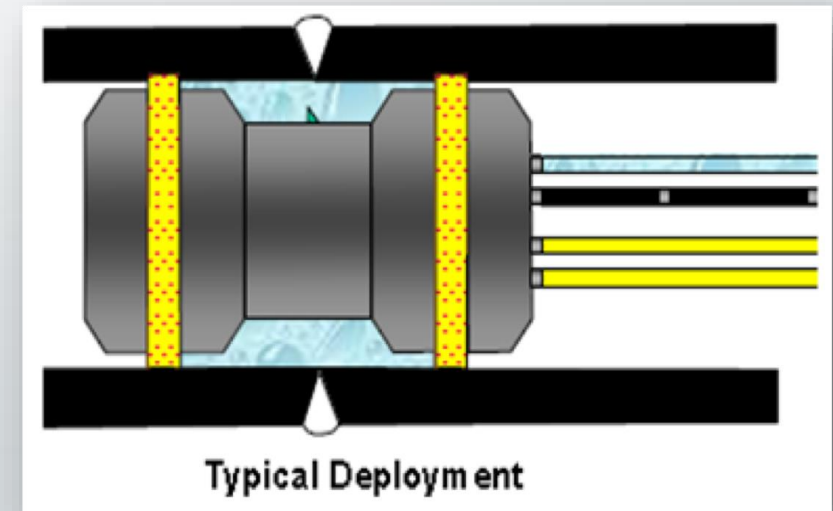

Flexible Dual Purpose Weld Tester



- The Flexible Dual Purpose Testers are designed to provide isolation whilst the line pipe hot work is conducted then carry out the subsequent pressure test
- The plugs can be used to traverse long radius bends and perform hydrostatic weld tests on elbows
- The tyres are inflated using water and create the seal with the pipe wall



6" Flexi Tester – Riser isolation and weld testing

RROS Weld Tester - Advantages

- Reduced costs
- Less time taken to fill for hydro test
- Less water used
- Reduced labour cost
- Strength test as well as leak test

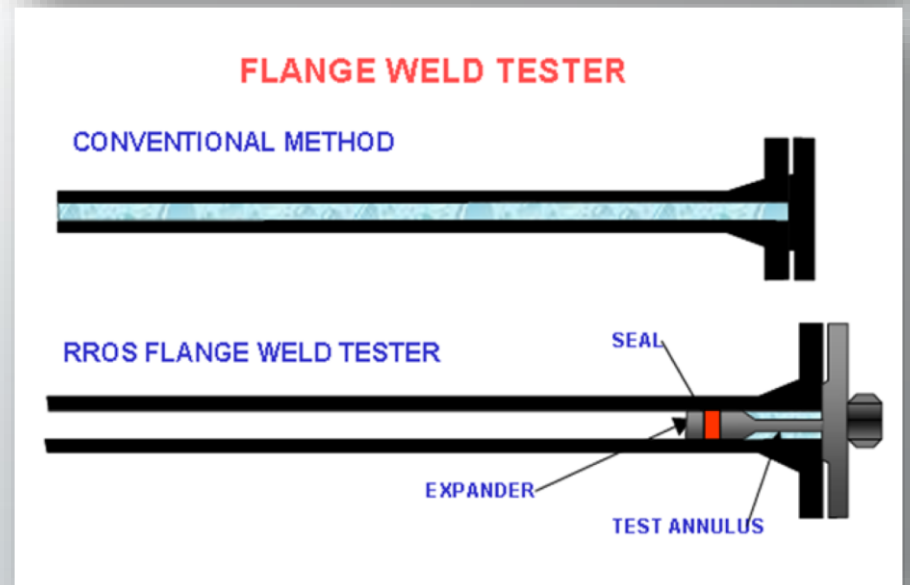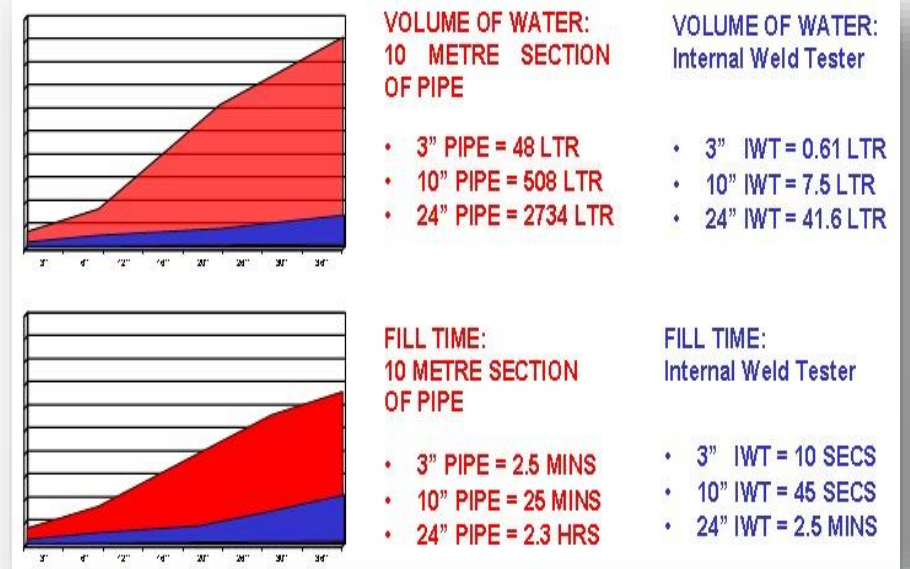



**ATMOSPHERIC WATER
GENERATOR (AWG)
- AIR TO WATER**



PROBLEMS ??

- No access to clean water network where you need it?
- Logistical challenges to transport potable water in emergency situations?
- Problems with the quality of the water you drink?
- Suffering water restrictions due to drought?
- Tired of buying and transporting expensive bottled water?
- In need of the highest water purity for your industrial processes?
- Concerned about the environmental impact due to the water you use (plastic bottles, desalination, pollution,...)?



**JUST PRODUCE CLEAN WATER AT SITE !!
ANYWHERE... ANYTIME...**

SOLACE ATMOSPHERIC WATER GENERATOR (SAWG)

SOLACE




WATER
GENERATOR

+

WATER
TREATMENT

AWG CONCEPT

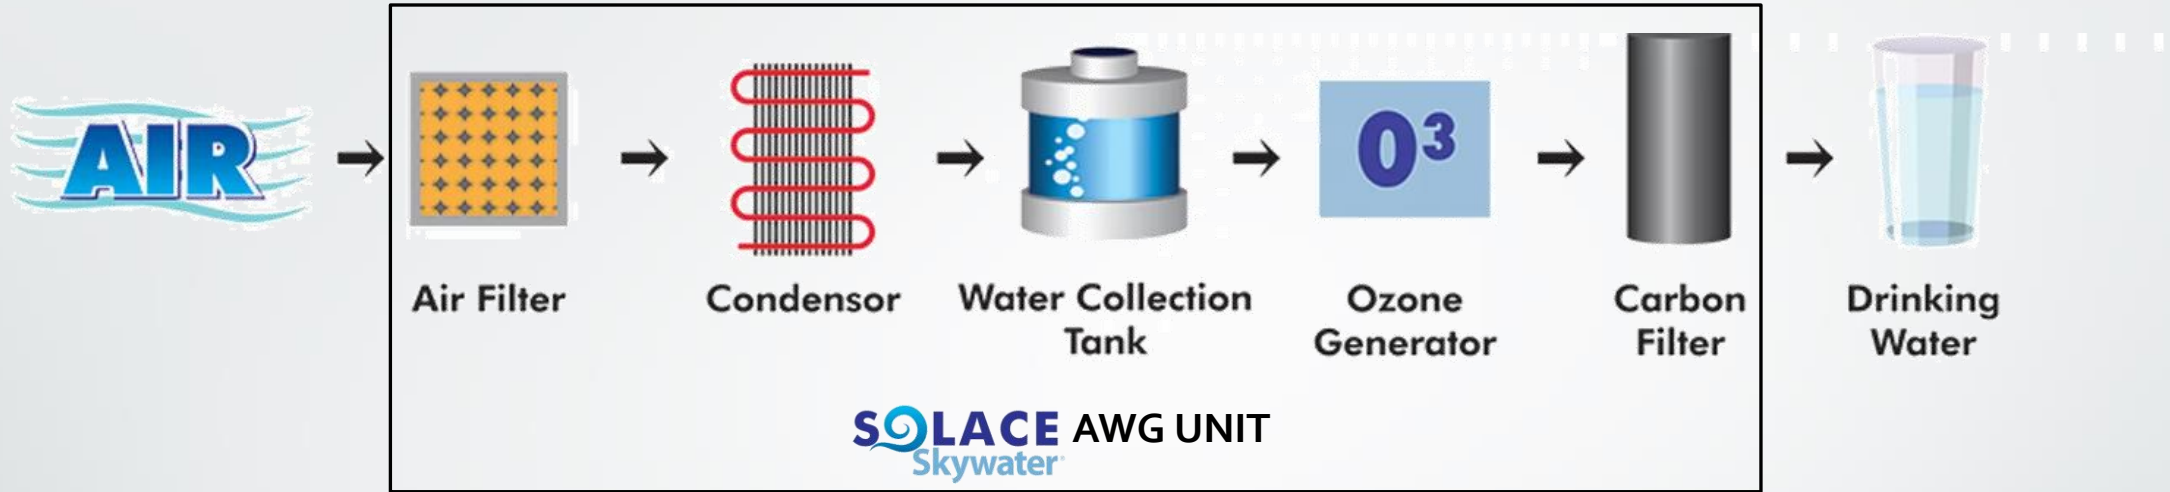

**Connect to a power source
(ie. portable generator, electrical grid, solar module, etc)**

- The AWG can generate the purest water anywhere we need it, by condensing water from air humidity in an autonomous and economic way.
- AWG harnesses the simple principle of Condensation to produce water. But the Technology that enables us to take that simple principle and produce greater yields of water is cutting edge!!
- As the Machine leverages the simple principle of condensation. Water vapor condenses onto a surface when that surface is cooler than the temperature of the available water vapor; cutting edge technology takes this simple principle and creates a water generator that delivers up to over 1,000 liters per day per unit

SOLACE ATMOSPHERIC WATER GENERATOR (SAWG)

SOLACE





MODEL & SPECIFICATIONS



	MODEL			
	SS-AWG-100	SS-AWG-250	SS-AWG-500	SS-AWG-1000
				
RATED DAILY WATER OUTPUT (24 HOURS)	100 LITERS	250 LITERS	500 LITERS	1,000 LITERS
POWER CONSUMPTION	1.9 KW	2.9 KW	4.4 KW	8.2 KW
ELECTRICAL POWER REQUIREMENT	380 V / THREE (3) PHASE , OR 220 V / SINGLE (1) PHASE	380 V / THREE (3) PHASE , OR 220 V / SINGLE (1) PHASE	380 V / THREE (3) PHASE , OR 220 V / SINGLE (1) PHASE	380 V / THREE (3) PHASE , OR 220 V / SINGLE (1) PHASE
NOISE LEVEL (dB A)	< 65	< 65	65	70
WORKING CONDITION	TEMPERATURE : 20°C ~ 45°C RH : 30% ~ 100%	TEMPERATURE : 20°C ~ 45°C RH : 30% ~ 100%	TEMPERATURE : 20°C ~ 45°C RH : 30% ~ 100%	TEMPERATURE : 20°C ~ 45°C RH : 30% ~ 100%
AMBIENT WORKING CONDITION FOR RATED OUTPUT	TEMPERATURE : 27°C RH : 80%	TEMPERATURE : 27°C RH : 80%	TEMPERATURE : 27°C RH : 80%	TEMPERATURE : 27°C RH : 80%
DIMENSION, L x W x H	71 x 71 x 140 cm	163 x 112 x 115 cm	180 x 112 x 115 cm	204 x 115 x136 cm
WEIGHT	120 KG	285 KG	375 KG	455 KG
REFRIGERANT	R22 OR R407C	R22 OR R407C	R22 OR R407C	R22 OR R407C
* OPTIONAL SYSTEM INTERGRATION	WATER TANK, BOOSTER PUMP, OZONE GENERATOR, UV RADIATION, NANO FILTERS, PH SENSOR, CONTROL PANEL			

SOLACE ATMOSPHERIC WATER GENERATOR - ENHANCEMENT

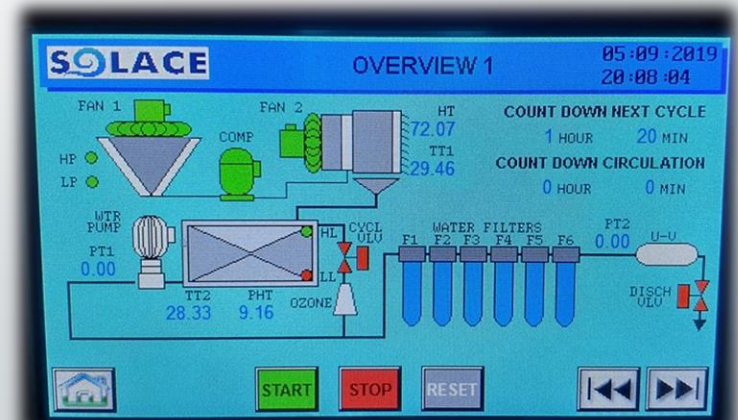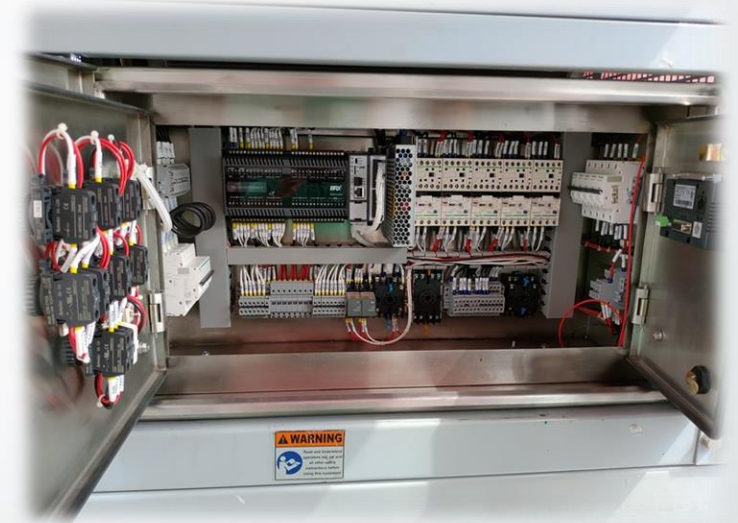


SAWG ADVANTAGES




Very portable and produce water anywhere and anytime you need.




Towards the Sustainable Development Goals (SDG) No.6 – Clean Water and Sanitation

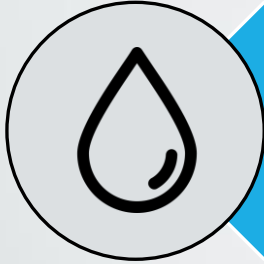


Produce pure and highest quality water without chemical treatment.

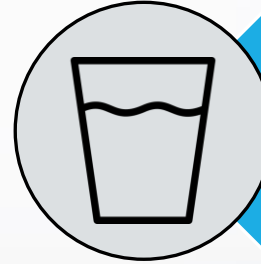

Producing drinking water at a lower cost than the conventional bottled water and water trucks.

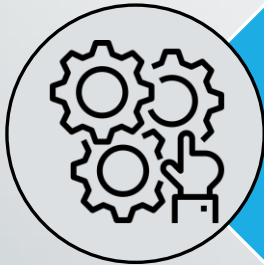

Autonomous and alternative water source solution. Just require air from the atmosphere and power supply.

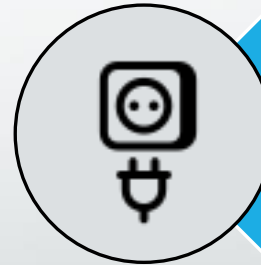

No complicated installation required. Just plug in to power supply to start producing water.



Environmental friendly. No hazardous waste is produced from the SAWG.




Produce water as much as you need since the atmosphere is abundance with water.

SAWG – MALAYSIA CLIMATE

AVERAGE MINIMUM AND MAXIMUM TEMPERATURE OVER THE YEAR

The monthly mean minimum and maximum daily temperature. Show in [Fahrenheit](#) »

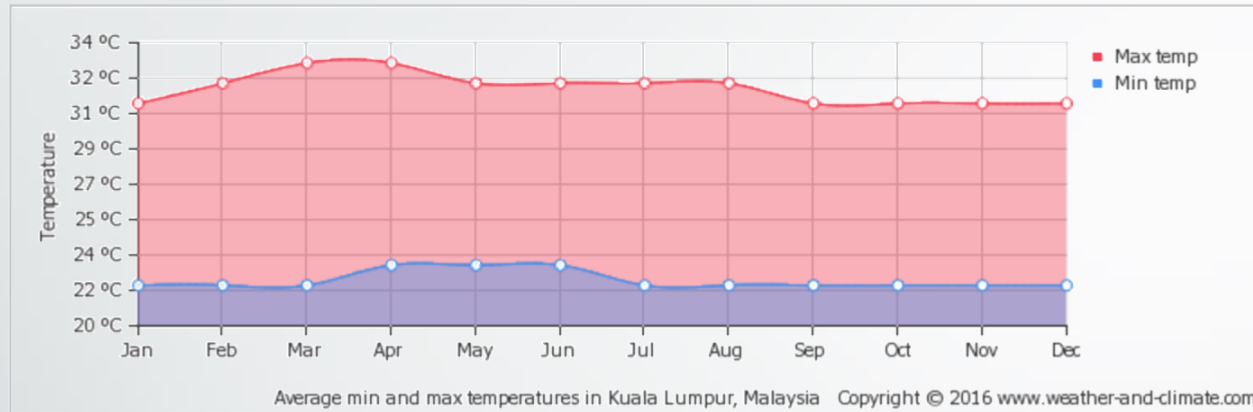

AVERAGE HUMIDITY OVER THE YEAR

This is the mean monthly relative humidity




- Our climate is ideal for the SAWG
- Very consistence and optimum output
- Cater personnel use
 - drinking & cooking
- Cater industrial use
 - fresh / demin water for testing
 - fresh / demin water for cooling

SAWG – CLIMATE COMPARISON




AVERAGE MINIMUM AND MAXIMUM TEMPERATURE OVER THE YEAR

The monthly mean minimum and maximum daily temperature. Show in [Fahrenheit](#) »

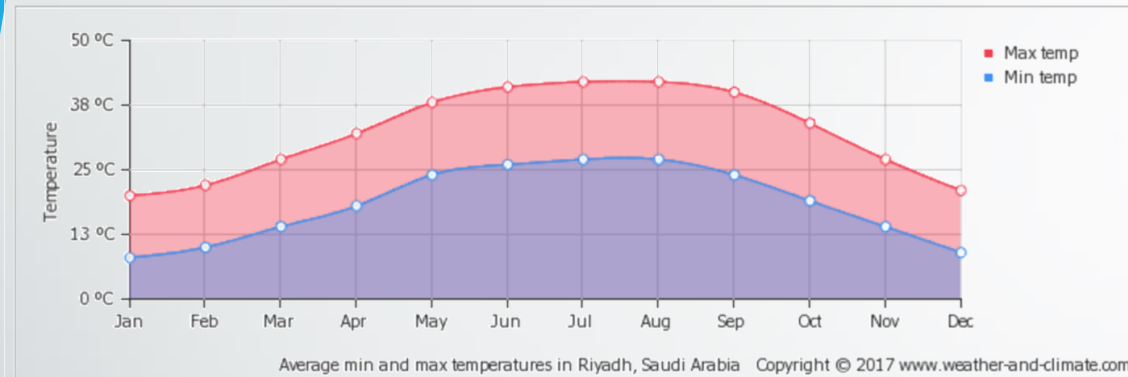


AVERAGE HUMIDITY OVER THE YEAR

This is the mean monthly relative humidity

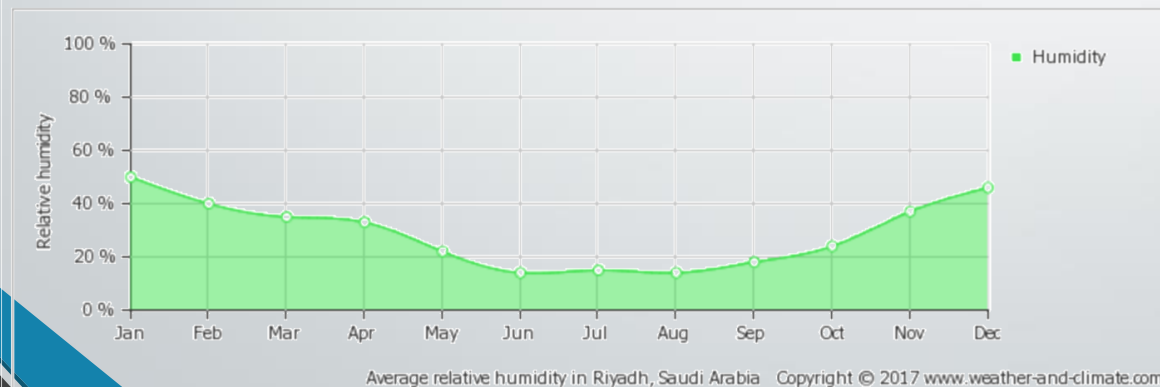

AVERAGE MINIMUM AND MAXIMUM TEMPERATURE OVER THE YEAR

The monthly mean minimum and maximum daily temperature. Show in [Fahrenheit](#) »

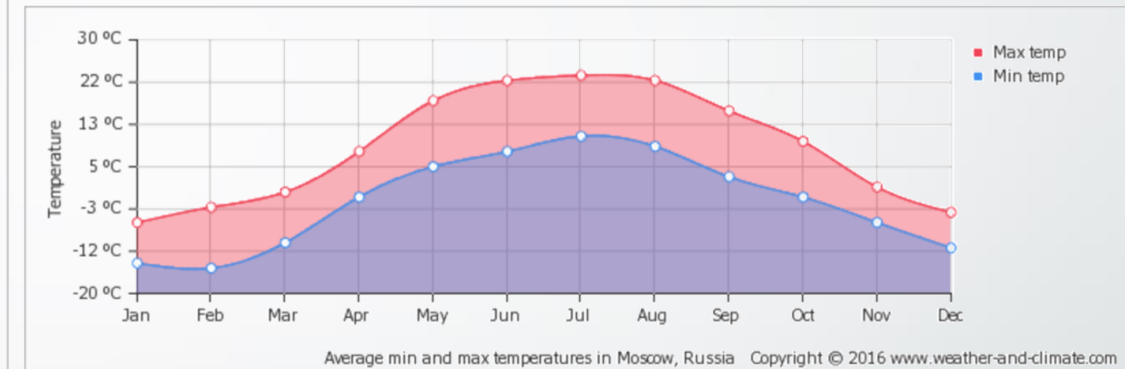

AVERAGE HUMIDITY OVER THE YEAR

This is the mean monthly relative humidity





MILITARY & DEFENSE PRODUCTS



SERT

MILITARY & LAW ENFORCEMENT
ACQUISITION & SUSTAINMENT SOLUTIONS



Design, Development, and Production of individual equipment and gear (military and law enforcement)

Supplier of 1st, 2nd, and 3rd line gear

Based at Woodbridge, VA with company owned production studios and a complete Berry Amendment solution for US made. In Addition, SERT has 200-acre training facility in Alderson, WV.

Registered as an Exporter with both US Department of States (Registration #M31001) and the US Department of Commerce, and a licensed importer of US Munitions List Articles with the BATFE. We maintain full compliance with ITAR & EAR

SOLACE

EQUIPMENT & CAPABILITIES

- > Tactical & OCIE
- > Weapon Systems
- > Medical Equipments
- > Munitions
- > LE / Mil Training

LICENSING & CERTIFICATION

- > EDWOSB
- > EIN: 45-3516377
- > DUNS: 078284396
- > CAGE: 6PE84
- > DDTC Export License ITAR
M31001
- > FFL 08 # 1-54-153-08-7E-14068





HELMET SYSTEM

REVISION BATLSKIN VIPER A3

TACTICAL PERFORMANCE HELMET

Revision's BATLSKIN VIPER A3 HELMET, designed specifically for Law Enforcement, Special Forces and SWAT personnel, stops NIJ IIIA level threats.

Manufactured to meet stringent quality standards, the helmet delivers the level of ballistic and impact head protection demanded for tough tactical operations. The Viper A3 helmet is made of aramid materials and built in the ACH shape.

The Batlskin Viper A3 Helmet is the foundation for all Batlskin modular components, including the Front Mount, Interlocking and Standalone Long Rails, Mandible Guard & Visor. Helmets are available in both Full, Mid and High cuts, sizes (small to x-large) and colors (black, foliage green, olive green and tan 499). They come standard with one NVG hole, 0.75" liner pads and 4-point harness with nape pad.



RIOT CONTROL SUIT

RIOT CONTROL SUIT

CONTACT US FOR MORE INFO



SERT RENEGADE

CARRIERS

Designed for utility and mobility in a compact lightweight design, it provides maximum functionality and maneuverability, and the perfect combination of protection and performance. Low profile, with great load carrying capacity.

- Offered in 500D or 1000D Nylon.
- Front & rear bottom loading plate pockets.
- Ambidextrous releasable system.
- Designed to hold 10" x 12" plates.
- PALS webbing on front & rear panels and cummerbund; to mount MOLLE compatible pouches.
- Removable padded shoulder pads.
- Cummerbund are secured via Velcro under front flap.
- Hard armor plates available in NIJ III, III+, IV standalone.

- Optional:
- Option of air mesh or nylon for the inner lining.
 - Optional detachable shoulders, groin, collar and biceps.
 - Optional side plate pouches in 5"x7", 6"x7" or 6"x8".





SERT BODY ARMOR 4400 LEVEL IV STANDALONE NIJ CERTIFIED

BODY ARMOR

Gamma Cut Single Curve Torso Plates

	S	M	L
Width x Length	8.0" x 10.0"	9.5" x 11.5"	10.0" x 12.0"
Weight / Thickness	5.0 lbs / 0.9"	7.1 lbs / 0.9"	7.8 lbs / 0.9"
Model Number	4400 GS	4400 GM	4400 GL



Single Curve Side Plates

	S	L
Width x Length	6.0" x 6.0"	6.0" x 8.0"
Weight / Thickness	2.3 lbs / 0.9"	3.1 lbs / 0.9"
Model Number	4400 SPS	4400 SPL



Threat Profile

Weapon Type	Ammunition	Striking Velocity ft/s ± 30	Striking Velocity m/s ± 9
Rifle M-1	7.62 x 63 mm - AP M2 **	2880	878
Rifle M-1	7.62 x 63 mm - JSP	2780	847
Rifle SVD, Dragunov	7.62 x 54R - B-32 API	2800	854
Rifle SVD, Dragunov	7.62 x 54R - LPS	2840	865
Rifle SVD, Dragunov	7.62 x 54R - L	2840	865
Rifle FN FAL	7.62 x 51 mm - M80 *	2780	847
Rifle AK-47, M, SKS	7.62 x 39 mm - API	2380	725
Rifle AK-47, M, SKS	7.62 x 39 mm - Mild Steel Core	2380	725
Rifle AK-47, M, SKS	7.62 x 39 mm - Ball	2380	725
Rifle M-16 / AR-15	5.56 x 45 mm - M855/SS109	3117	950
Rifle M-16 / AR-15	5.56 x 45 mm - M193	3150	960

* NIJ Level III Certification Threat

Ceramic/composite design.
Polyurea coated 1000 Denier CORDURA®
fabric finish.
NIJ Standard-0101.06.
Tested and verified to meet or exceed ballistic
resistance as specified under NIJ Standard
0101.06 plus Special Rifle Threats validated.
Ballistic Areal Density : 10.3 lbs/ft²

WEAPON CASES



TACTICAL CARBINE / RIFLE CASE TCC (MODULAR)

SERT-TCC
Available in 30", 36", 42", and 46"
Material : Nylon Cordura

BELTS & GLOVES



More Views




TACTICAL GLOVE MECHANIX M-PACT WOLF GREY

The M-Pact® Wolf Grey provides law enforcement and special forces with tactical hand protection fit for urban environments. Impact-absorbing Thermoplastic Rubber delivers flexible protection in the field against impact injuries and skin abrasions. Our patented Impact Guard™ frees the index finger for smooth trigger guard entry and mobility during hard-charging operations. The dual-layer internal fingertip construction reinforces your thumb and index finger to provide improved abrasion resistance. XRD® padding in the palm absorbs impact and vibration to reduce hand fatigue when you're fully engaged. Imported

FEATURES

1. Impact Guard™ protects first knuckle with EVA foam padding.
2. Thermoplastic Rubber (TPR) knuckle guard and finger guards protect against impact.
3. Form-fitting Wolf Grey TrekDry™ keeps hands cool and comfortable.
4. Thermoplastic Rubber (TPR) closure provides a secure fit.
5. Armortex® palm reinforcement.
6. Dual-layer internal fingertip reinforcement provides added durability.
7. Embossed and textured index finger and thumb provides grip.
8. XRD® palm padding absorbs impact and vibration.
9. Durable synthetic leather palm.
10. Nylon pull loop.
11. Machine washable.



SERT



IFM RIGID 6V



- * Materials: 6061 aluminum
- * 3V or 6V available
- * Left or right side rail grabbers available
- * Compatible with all SureFire 3V and 6V components
- * Available with or without SureFire light
- * Patent #: US827556



PVS-14 NIGHT VISION MONOCULAR



EYE RELIEF:	25 MM
POWER SOURCE/LIFE:	(1) AA-SIZE BATTERY/50+ HRS
FOCUS RANGE:	9.8" TO INFINITY
SUBMERSIBLE:	66 FEET
MAGNIFICATION:	ONE POWER (1X)
FIELD OF VIEW:	40°
DIOPTER ADJUSTMENT:	-6 TO +2
OBJECTIVE LENS:	26MM, F/1.2
WEIGHT:	12.5 OZ (355 G) W/O BATTERIES
DIMENSIONS:	4.5" x 2.5" x 2.75"

FEATURES

- TEN YEAR WARRANTY
- SINGLE AA BATTERY USAGE
- SUBMERSIBLE TO 66 FEET
- INFRARED LED INDICATOR
- HIGH LIGHT CUTOFF
- LOW BATTERY LED INDICATOR
- GAIN CONTROL

The **NVD-PVS-14 Monocular** is a versatile, high performance system designed to assist viewing during night-time operations, while being hand-held, helmet or weapon mounted. The user can retain their night-adapted vision in one eye while viewing their surroundings through the illuminated eyepiece. The PVS-14 is the most commonly used system by Law Enforcement and Military, but can also be utilized for predator hunting or home surveillance. This system complies with MIL-PRF-49324(CR), MIL-PRF-49427(CR) and MIL-STD-810G. With more than one million systems fielded by the DOD and Armies around the world, the PVS-14 is the all around best multi-functional night vision monocular available. Parts & service for this system will be available for another 25+ years.

FVS 14 SYSTEM PERFORMANCE										
MODEL NUMBER	ULTRA	VS	VS2	10T	10T+	P+	P	W1P	W2	
POWER SUPPLY	PINNACLE	PINNACLE	PINNACLE	PINNACLE	PINNACLE	PINNACLE	PINNACLE	PINNACLE	PINNACLE	
	FBI	2.5 MAX	2.5 MAX	2.5 MAX	2.5 MAX	2.5 MAX	2.5 MAX	2.5 MAX	2.5 MAX	
PHOTOGRAPHIC RESPONSE	2200 MP	2000 MP	1800 MP	2200 MP	1750 MP	1550 MP	2200 MP	1350 MP	1350 MP	
SIGNAL TO NOISE RATIO	250 MP	250 MP	250 MP	250 MP	250 MP	250 MP	250 MP	250 MP	250 MP	
RESOLUTION	64 LP/ MM MP	64 LP/ MM MP	64 LP/ MM MP	64 LP/ MM MP	64 LP/ MM MP	64 LP/ MM MP	57 LP/ MM MP	64 LP/ MM MP	57 LP/ MM MP	




Standard accessories included with each NYD-PVS-14: Soft Carry Case, Operator's Manual, (2) AA Batteries, Denier Shield Cleaning Cloth for Objective Lens, Head/Mount Mount Adapter [new], Kfloaton Ball Weapen Mount, Shoulder Strap, Headset Assembly with 3.5mm Pds, Lens Tissue, Neck Cord, Eye-Cup, Shuttered Eyeglass and Front Lens Cap.

Optional Accessories: Hand Case, SX Hanger, SX Hanger, Comfort Assembly, H2020 Helmet Mount, MCH Helmet Mount and Gunner's Adaptor.




S&S PRECISION O2D2
OXYGEN MASK RETENTION SYSTEM

Oxygen Mask Retention System with Comm for use during HALO / HAHO Jumper mission.



S E R T

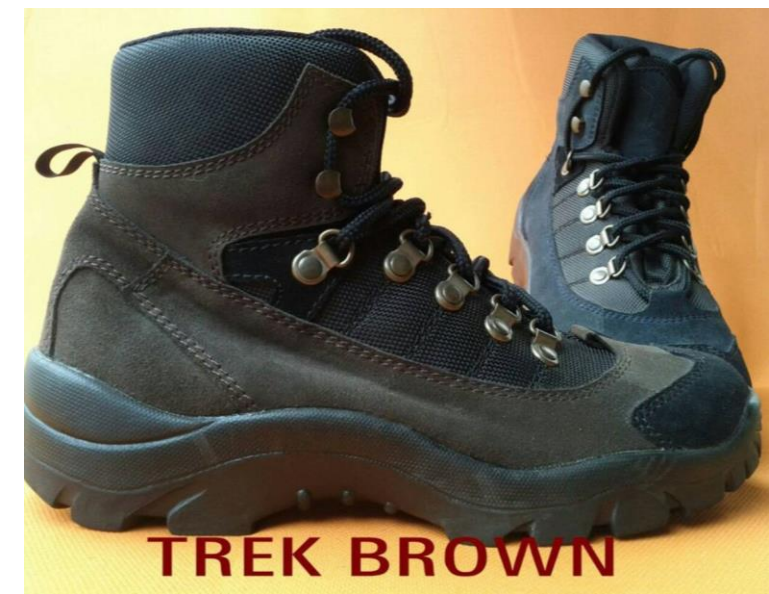





CONTACTS



Office Address :

A-07-07, Block A, RADIA Offices, Persiaran Arked, Bukit Jelutong, Seksyen U8,
40150 Shah Alam, Selangor Darul Ehsan, Malaysia.

Phone :

+603-8741 3878

Web & Email Address :

www.solace.com.my | info@solace.com.my

Contact Persons:

Dato' Seri Mohammad Shahil Bin Ishak – Chairman | shahil@solace.com.my

Mohd Dannial – Executive Director | +6012-216 7408 | dannial@solace.com.my

Mohd Idris – Executive Director | +6012-530 3457 | idris@solace.com.my

Mohd Helmi – Marketing & Business Division | +6019-772 5297 | helmi@solace.com.my